



# iPod Touch 5th Generation Lightning Connector Assembly Replacement

prerequisite

Written By: Andrew Optimus Goldberg



## INTRODUCTION

prerequisite

---



### TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Suction Handle](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — Lightning Connector Assembly



- Use the tip of a spudger to peel back a small piece of tape covering a screw on the side of the headphone jack.

## Step 2



- Remove the following screws securing the headphone jack, Lightning connector, and speaker.
  - Three 2.6 mm #00 Phillips screws
  - Two 2.0 mm #00 Phillips screws




## Step 3



- Use the flat end of a spudger to pry the speaker up from the rear case.

⚠ Do not try to remove the speaker, as it is soldered to the Lightning connector assembly.

## Step 4

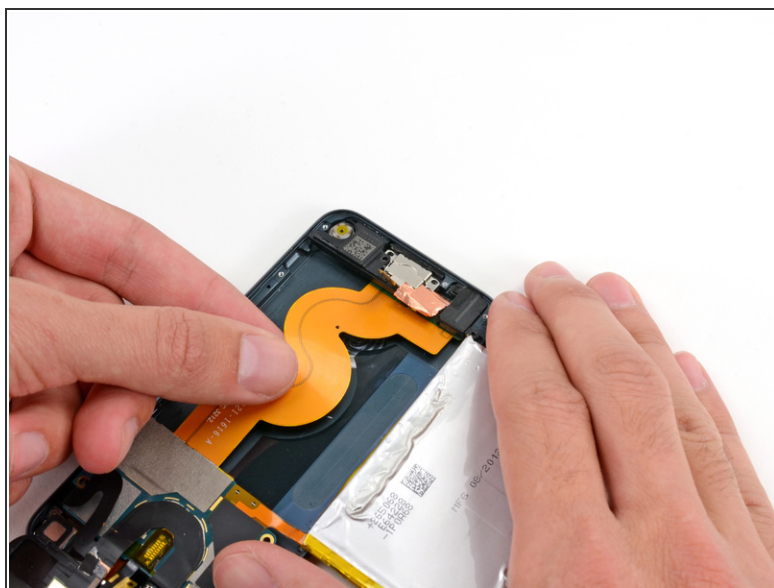

- Grasping the large ribbon cable, gently pull the Lightning connector assembly out of the bottom of the case.

To reassemble your device, follow these instructions in reverse order.

